

Red Spring -Spring Return Signposts

2.8m SIGNPOSTS THAT SPRING BACK UPRIGHT AFTER IMPACT



Patented Australian Innovation - Proven Performance - Exported around the World

The patented Spring Return Signpost system transforms a standard signpost installation into a, full 360 degree impact recovering, passive safe signpost installation. Spring Return Sign Posts will always return to vertical after impact with the sign still in the correct orientation.


Red spring units are designed for use as tall steel signposts up to **2.8m** tall, providing the standard 2.2m clearance under a 600mm sign.

Spring Return Signpost saves \$\$\$ by protecting both the installation and the vehicle driver from damage.

► APPLICATIONS

- road island signage
- roadside signage
- round about approaches
- car parks

Red Spring SRS Base Unit - Simply fit your own post to our base

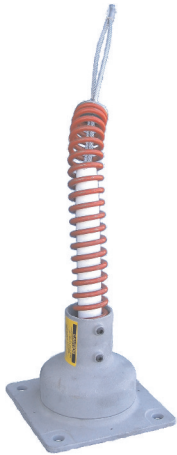

TP100203

► PRODUCT DETAILS

Red spring base units are designed to be fitted with 60mm OD or (2-3/8") steel signposts between 1.6m to 2.8m tall.

Red Spring Base units are supplied as pictured in a surface mount version only. NOTE: Socket mount installation can be achieved using a socket mount adaptor (*see overleaf*)

Full technical installation drawings, and a complete list of compatible post types can be found on our website downloads page.

See overleaf side for post information

Red Spring SRS Signpost - Ready to Install



TP140203

► PRODUCT DETAILS

The **Red Spring** - Spring Return Signpost Assembly is supplied as pictured with a factory fitted 60mm OD or (2-3/8") x 2.8m high steel post ready to install.

Red Spring Base units are supplied in a surface mount version only. NOTE: Socket mount installation can be achieved using a socket mount adaptor (*see overleaf*)

Full technical installation drawings, and a complete list of compatible post sizes can be found on our website downloads page.

How to Buy!

Direct from our Website

www.jmbsignposts.com

Phone:

JMB Office: 07 38147 882

Ian Brodie: 0408 775 172

Email:

info@jmbsignposts.com

See overleaf for product detail and accessory information

RED SPRING SRS BASE UNITS

Simply fit your own post to our base!

TP100203

Red Spring
Socket Mount Base Unit
Suits Steel Post


Base Unit Specifications:

Signpost Size:

- steel CHS post 60mm OD or (2-3/8")
- max wall 2.3mm or (3/32")

Signpost Height Range:

- Min - 1600mm (63")
- Max - 2800mm (110")

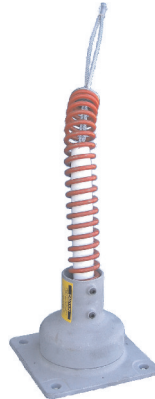

Full technical information can be found on our website downloads page.

RED SPRING SRS SIGNPOSTS

Post and Base Supplied


TP140203

Spring Return Signpost
Socket Mount – 2.8m
(110") steel post fitted

to complete the job




Bolt Down Pattern

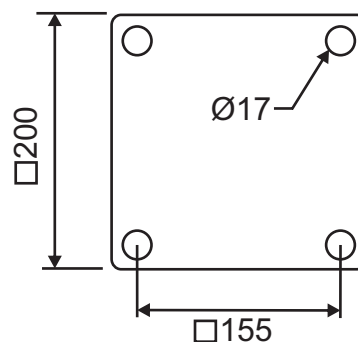

Sign Carrying Capacity - Red Spring Units

- Fitted with a 2800mm post the base unit can recover one fitted 600 x 600mm Al sign
- Fitted with a 2400mm post or less the base unit can recover with two fitted 600 x 600mm Al signs

ADD



Detent Bracket Set

Product Ref: DB001 - set of 4

Detents provide increased resistance to initial movement, yet still allow the SRS unit to work as normal when impacted.

Ideal for high wind areas to prevent unwanted movement in very high wind gusts

Great for pedestrian areas to prevent unwanted post movement from human interaction

ADD



Socket Mount Adaptor Kit

Product Ref: SA410 - 187mm stub length

Socket mount adaptor kits are used to quickly and easily convert socket mount sites into surface mount sites with no need for any ground work

ADD



Ground Sleeves- Concrete Installations

Product Refs: WE001 Locking Wedge, GS201 Ground Sleeve

Ground sleeves are concreted in place. The Socket Mount Base Unit simply inserts into the ground sleeve and is locked into position with a wedge or a through bolt. When used with Spring Return Signpost no site damage from impact will ever occur again

ADD



Surface Mount Installation Kit – Concrete Installations

Product Ref: MK203

4 pieces 16 x 65 DYNA BOLTS, this installation kit is suitable for use with all Surface Mounted Spring Return Base Unit installations.

Full technical information can be found on our website downloads page.