




SOCKET MOUNT ADAPTOR KIT - PRODUCT REF: SA410A

CONTAINS:

4 X M16 x 25 HEX BOLTS (Galv)
4 X M16 FLAT WASHERS Galv)
1 X WE001 LOCKING WEDGE
1 X SA410 SHORT SOCKET MOUNT ADAPTOR

EXPLODED VIEW OF THE GROUND SPIKE INSTALLATION COMPONENTS

PREFERRED POST ORIENTATION FOR DIRECTION OF TRAFFIC

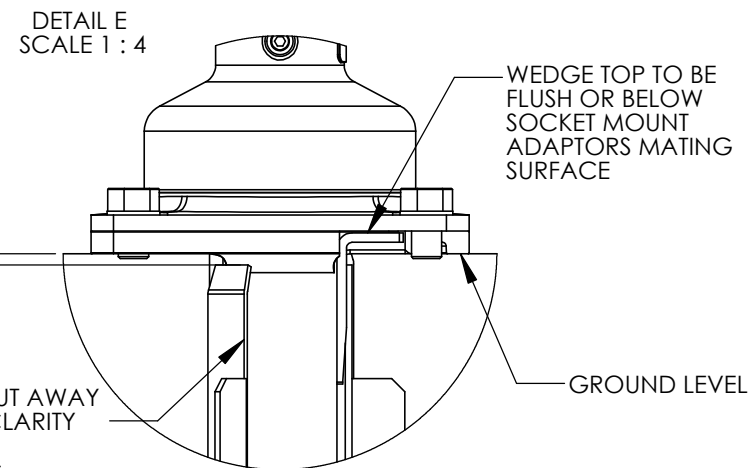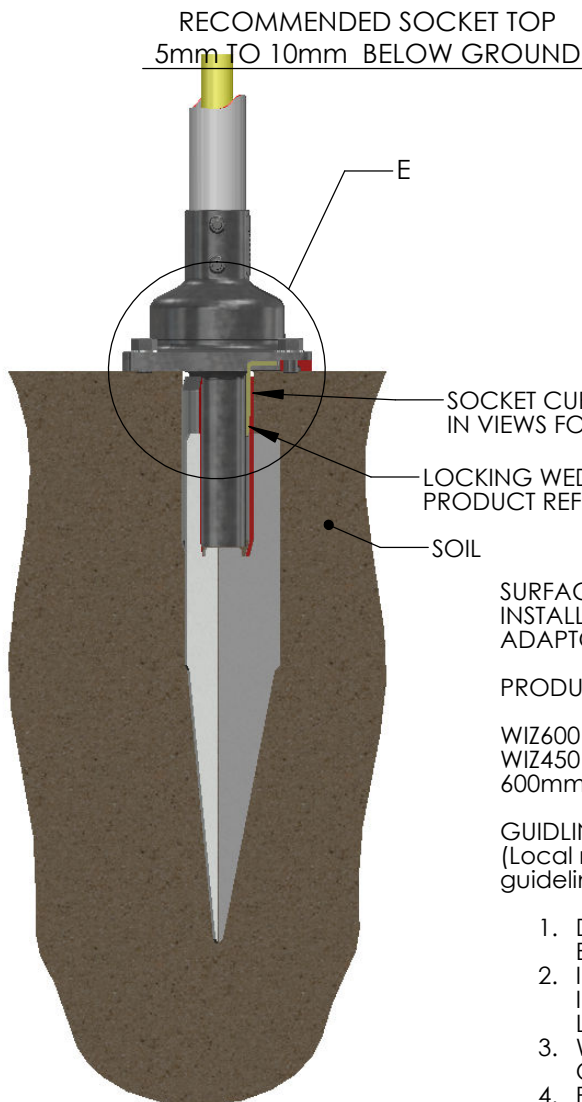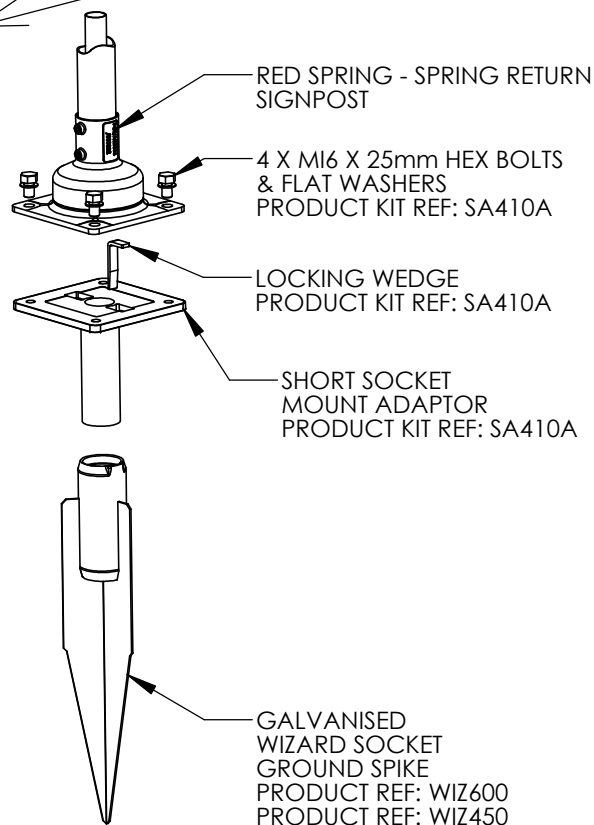

SURFACE MOUNT SPRING RETURN SIGNPOSTS - RED SPRING - CAN BE INSTALLED WITH A DRIVABLE GROUND SPIKE USING A SOCKET MOUNT ADAPTOR KIT

PRODUCT REF : WIZ600, WIZ450 , SA410A

WIZ600 SOCKETS SHOULD BE USED FOR SOFTER SOILS
WIZ450 SOCKET SHOULD BE USED WHERE SOIL IS TOO HARD TO DRIVE A 600mm SPIKE

GUIDELINES FOR INSTALLING:
(Local regulations should always take precedent over these installation guidelines)

1. DRIVE SPIKE INTO THE GROUND LEAVING A MINIMUM OF 5mm EXPOSED
2. INSERT SOCKET MOUNT ADAPTOR IN THE CORRECT ORIENTATION INTO THE GROUND SPIKE CUP AND LOCK IN POSITION USING THE LOCK WEDGE.
3. WEDGE TOP SURFACE MUST BE FLUSH OR BELOW THE MATING FACE OF THE SOCKET MOUNT ADAPTOR
4. POSITION SPRING RETURN SIGNPOST ON THE SOCKET MOUNT ADAPTOR AND FIT THE 4 x M16 BOLTS AND FLAT WASHERS
5. TIGHTEN IN A DIAGONAL PATTERN

INFORMATION APPLICABLE TO:
SURFACE MOUNT - SPRING RETURN SIGN POST UNIT
- RED SPRING

SCALE	NTS
CHECKED	ICB
LAST UPDATE	4/01/2015
DRAWN	Ian Brodie
DATE	06/05/2011

ALL DIMENSIONS IN MILLIMETERS	QUANTITY	1	DO NOT SCALE IF IN DOUBT ASK
MATERIAL	NA		
FINISH	NA		
DESCRIPTION	TALL SPRING RETURN SIGNPOSTS TECHNICAL INFORMATION SHEET 8 SOCKET MOUNT ADAPTOR - WIZARD SOCKET INSTALLATION GUIDELINES		

JMB MANUFACTURING PTY LTD

24 BRIGID BOULEVARD
AUSTINE HEIGHTS
QLD AUSTRALIA 4300
PH. 07 3814 7882
FAX. 07 3814 7884



ACAD FILE NAME
Technical Information 27-06-2014

SH. 7

Part:

OF 13